

AC/DC Converter
Non-Isolated Flyback Converter
PWM type 10 W (5 V/2 A)
BM2PDA1Y-Z Evaluation Board

<High Voltage Safety Precautions>

◇ Read all safety precautions before use

Please note that this document covers only the **BM2PDA1Y-Z** evaluation board (BM2PDA1Y-EVK-002) and its functions. For additional information, please refer to the datasheet.

To ensure safe operation, please carefully read all precautions before handling the evaluation board



Depending on the configuration of the board and voltages used,

Potentially lethal voltages may be generated.

Therefore, please make sure to read and observe all safety precautions described in the red box below.

Before Use

- [1] Verify that the parts/components are not damaged or missing (i.e. due to the drops).
- [2] Check that there are no conductive foreign objects on the board.
- [3] Be careful when performing soldering on the module and/or evaluation board to ensure that solder splash does not occur.
- [4] Check that there is no condensation or water droplets on the circuit board.

During Use

- [5] Be careful to not allow conductive objects to come into contact with the board.
- [6] **Brief accidental contact or even bringing your hand close to the board may result in discharge and lead to severe injury or death.**

Therefore, DO NOT touch the board with your bare hands or bring them too close to the board.

In addition, as mentioned above please exercise extreme caution when using conductive tools such as tweezers and screwdrivers.

- [7] If used under conditions beyond its rated voltage, it may cause defects such as short-circuit or, depending on the circumstances, explosion or other permanent damages.
- [8] Be sure to wear insulated gloves when handling is required during operation.

After Use

- [9] The ROHM Evaluation Board contains the circuits which store the high voltage. Since it stores the charges even after the connected power circuits are cut, please discharge the electricity after using it, and please deal with it after confirming such electric discharge.
- [10] Protect against electric shocks by wearing insulated gloves when handling.

This evaluation board is intended for use only in research and development facilities and should be handled **only by qualified personnel familiar with all safety and operating procedures.**

We recommend carrying out operation in a safe environment that includes the use of high voltage signage at all entrances, safety interlocks, and protective glasses.

AC/DC Converter

Non-Isolated PWM type Flyback Converter

10W 5 V Output

BM2PDA1Y-Z Evaluation Board

BM2PDA1Y-EVK-002

Feature

- (1) Adjustable Output Voltage with External Resistor
- (2) High Accuracy Output by Output Direct Monitor of Output Voltage
- (3) 65 kHz Frequency
- (4) Internal Start up Circuit 730 V (peak)
- (5) Internal Super Junction FET 730 V (peak) ($R_{on} = 1.2 \Omega$)
- (6) Internal Current Sense Resistor (Detection Current 0.93 A)
- (7) Contributes to Low EMI by Internal Hopping Function



Figure 1. BM2PDA1Y-EVK-002

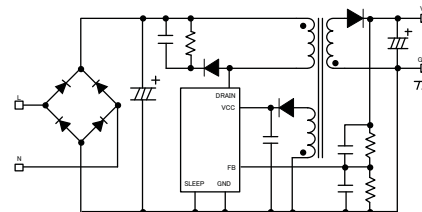


Figure 2. BM2PDA1Y-EVK-002 Simple Schematic

Specification

Table 1. Input Range

Parameter	Min	Typ	Max	Units	Conditions
Input Voltage Range	90	230	264	Vac	
Input Frequency Range	47	50 / 60	63	Hz	
Operating Temperature	-10	+25	+65	°C	

Table 2. Evaluation board specification

These are representative values and not a guarantee of the characteristics, unless stated otherwise use $V_{IN} = 230 \text{ Vac}$, $I_{OUT} = 0.2 \text{ A}$, $T_a = 25 \text{ °C}$.

Parameter	Min	Typ	Max	Units	Conditions
Output Voltage	4.75	5.0	5.25	V	$I_{OUT} = 0.2 \text{ A}$
Output Maximum Power	-	-	10	W	$I_{OUT} = 2.0 \text{ A}$
Output Current Range ^(Note 1)	0	-	2.0	A	
No Load Power Consumption	-	-	100	mW	$I_{OUT} = 0 \text{ A}$
Efficiency	-	79	-	%	
Output Ripple Voltage ^(Note 2)	-	250	-	mVpp	

(Note 1) Adjust the operating time so that surface temperature of no component exceeds 105 °C

(Note 2) Do not consider spike noise

Operation Procedure

1. Operation equipment

- (1) AC power supply 90 Vac to 264 Vac, 15 W or more
- (2) Electronic Load capacity 2.0 A
- (3) Multimeter

2. Connection Instruments

- (1) Turn off each power supply and connect the measuring instrument as shown Figure 3. .
- (2) Turn on the power supply setting between 90 Vac to 264 Vac
- (3) Turn on the electrical load setting between 0 to 2.0 A.
- (4) Connect the multimeter directly to the output and check the voltage by sensing.



Figure 3. Connection Circuit

Circuit

$V_{IN} = 90 \text{ Vac to } 264 \text{ Vac}$, $V_{OUT} = 5 \text{ V}$

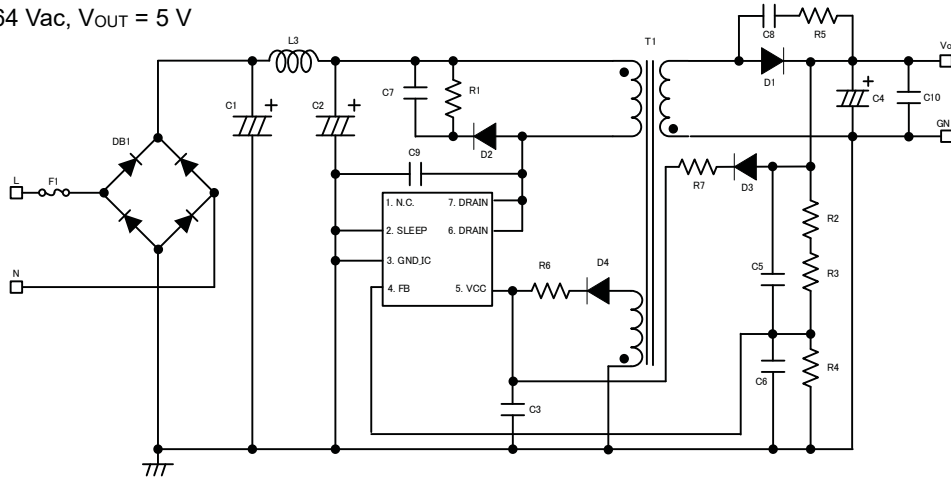


Figure 4. Application Circuit

Attention: Place C6 connected between FB and GND_IC terminals as close to the terminal as possible.

BOM List

Item		Specifications	Parts name	Manufacture
Capacitor	C1	12 μF , 450 V	UCY2W120MP01TD	NICHICON
	C2	12 μF , 450 V	UCY2W120MP01TD	NICHICON
	C3	2.2 μF , 50 V	UMK316B7225KL-T	TAIYO YUDEN
	C4	1000 μF , 25 V	25ZLJ1000M10x20	RUBYCON
	C5	1000 pF, 100 V	HMK107B7102KA-T	TAIYO YUDEN
	C6	1000 pF, 100 V	HMK107B7102KA-T	TAIYO YUDEN
	C7	2200 pF, 630 V	SMK316BJ222KF-T	TAIYO YUDEN
	C8	-	NON MOUNTED	-
	C9	-	NON MOUNTED	-
	C10	10 μF , 35 V	GMK316AB7106ML-TR	TAIYO YUDEN
Connector	CN1	-	B02P-NV	JST
Diode	D1	SBD, 15 A, 60 V	RBR15BM60A	ROHM
	D2	FRD, 0.8 A, 700 V	RFN1LAM7S	ROHM
	D3	-	NON MOUNTED	-
	D4	FRD, 0.5 A, 200 V	RF05VAM2S	ROHM
	DB1	1 A, 800 V	D1UBA80	SHINDENGEN
Fuse	F1	1.6 A, 300 V	36911600000	LITTELFUSE
IC	IC1	-	BM2PDA1Y-Z	ROHM
Inductor	L3	470 μH	7447471471	WURTH ELECTRONIK
Resistor	R1	47 k Ω	KTR18EZPJ473	ROHM
	R2	0 Ω	MCR03EZPJ000	ROHM
	R3	300 k Ω	MCR03EZPFX3003	ROHM
	R4	200 k Ω	MCR03EZPFX2003	ROHM
	R5	-	NON MOUNTED	-
	R6	10 Ω	MCR10EZPJ100	ROHM
	R7	-	NON MOUNTED	-
Transformer	T1	EE19	XE2512Y C	ALPHA TRANS
Test Pin	TP1	BLACK	LC-2-G-BLACK	MAC8
	TP2	RED	LC-22-G-RED	MAC8

Layout

Size 60 mm x 40 mm

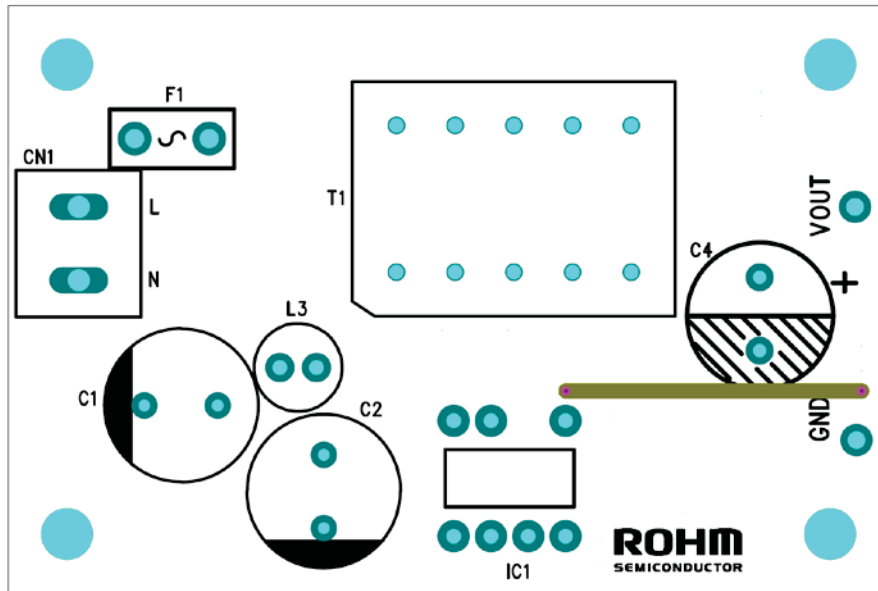


Figure 5. Top Silkscreen (Top view)

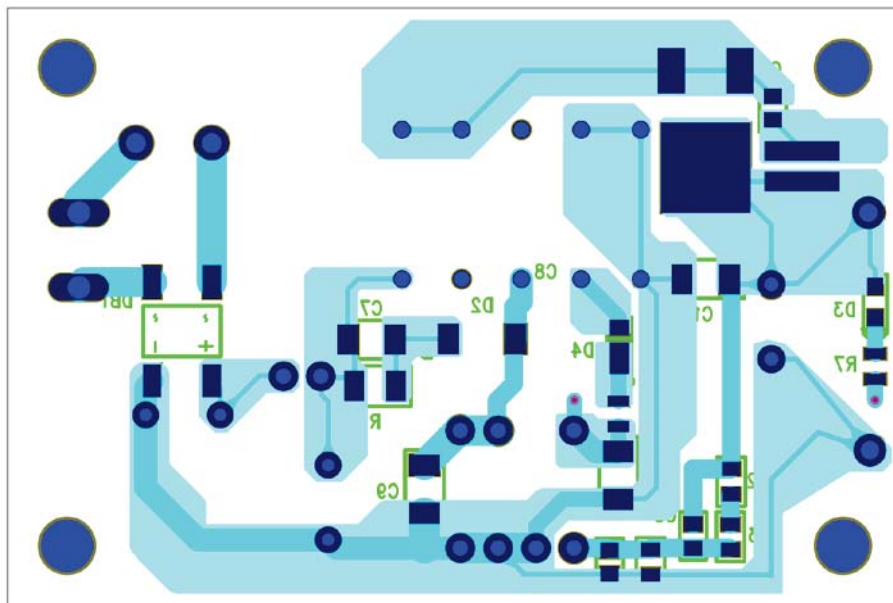


Figure 6. Bottom Layout (Bottom view)

Attention: Place C6 connected between FB and GND_IC terminals as close to the terminal as possible.

BM2Pxx1Y Overview

Features

- PWM Current Mode
- Built-in Frequency Hopping Function
- Burst Operation at Light Load
- Built-in 730 V(peak) Starter Circuit
- Built-in 730 V(peak) Super Junction MOSFET
- VCC UVLO (Under Voltage Lockout)
- VCC OVP (Over Voltage Protection)
- Over Current Limiter Function per Cycle
- Soft Start Function
- Sleep Mode

Key Specifications

- Operating Power Supply Voltage Range

VCC	11.10 V to 26.00 V
DRAIN	730 V (peak)(Max)
- Operating Current (Normal): 650 μA (Typ)
- Operating Current (Burst): 350 μA (Typ)
- Operating Current (Sleep): 65 μA (Typ)
- Switching Frequency: 25 kHz / 65 kHz (Typ)
- Operation Temperature: -40 °C to +105 °C
- MOSFET ON Resistance: 1.2 Ω (Typ)




Figure 7. Pin Configuration


Application

Washing machine, Air conditioner, Other white goods

Package

DIP7K

W(Typ) x D(Typ) x H(Typ)
 9.27 mm x 6.35 mm x 8.63 mm
 Pitch 2.54 mm



Line Up

Model Name	Switching Frequency	Frequency Reduction	OCP Current
BM2PAA1Y-Z	65 kHz	O	1.76 A
BM2PAB1Y-Z	25 kHz	-	
BM2PDA1Y-Z	65 kHz	O	0.93 A
BM2PDB1Y-Z	25 kHz	-	

Table 3. BM2Pxx1Y-Z Pin Description



No.	Name	I/O	Function
1	N.C.	-	Non connection
2	SLEEP	I	Sleep/Normal modes witching pin
3	GND_IC	I/O	GND pin
4	FB	I	Output voltage feedback pin
5	VCC	I	Input voltage pin
6	DRAIN	I/O	MOSFET drain pin
7	DRAIN	I/O	MOSFET drain pin

Transformer Specification


Manufacture

Alphatrans Co., Ltd. (1-7-2, Bakurou-cho, Chuo-ku, Osaka City, 541-0059, Japan)

<http://www.alphatrans.jp/>

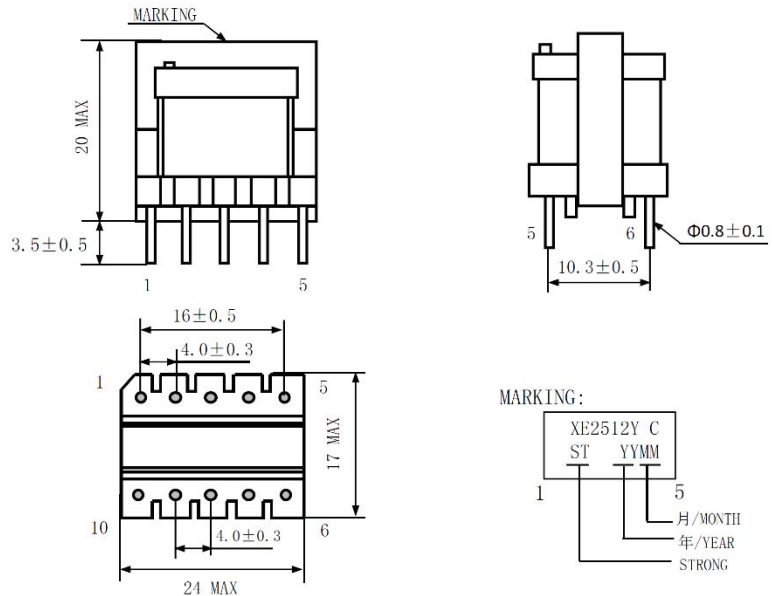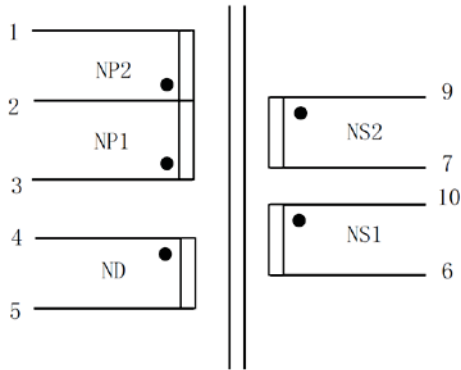

3. 構造/WINDING CONSTRUCTION

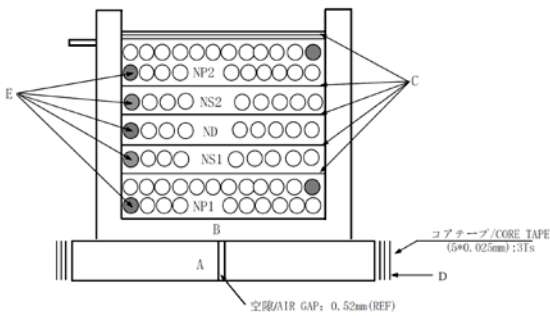

4. 巻線仕様/WINDING SPECIFICATION

NO.	WINDING	TERMINAL		WIRE SIZE	TURNS	TAPE LAYERS	WINDING METHOD	NOTE
		START	FINISH					
1	NP1	3	2	2UEW/Φ0.30mm*1	48	1	COMPACT	
2	NS1	10	6	TEX-E/Φ0.25mm*2	9	1	COMPACT	(Note 1)
3	ND	4	5	2UEW/Φ0.26mm*1	27	1	COMPACT	
4	NS2	9	7	TEX-E/Φ0.25mm*2	9	1	COMPACT	(Note 1)
5	NP2	2	1	2UEW/Φ0.30mm*1	48	3	COMPACT	
				PART NO.	XE2512Y			
				DESCRIPTION	EE19 TRANSFORMER			

6. 電気特性/ELECTRICAL CHARACTERISTICS:

NO.	項 ITEM	測定端子 TERMINAL	仕様 SPECIFICATION	測定条件 TEST CONDITION	検査方法 INSPECTION STANDARD
1	インダクタンス INDUCTANCE	3---1	628.5uH±10%	f=100kHz, v=1V (CH-1062A 内阻50Ω)	全検 ALL
2	耐電圧 HI-POT TEST	P---S	AC1000V, 1mA, 1MIN	f=50Hz	抜取 SAMPLING (製造工程全 検ALL 電圧 *120%, 2秒)
		S---C	AC1000V, 1mA, 1MIN		
		P---C	AC1000V, 1mA, 1MIN		
3	絶縁抵抗 INSULATION RESISTANCE	P---S	100MΩ MIN	DC 500V	抜取 SAMPLING
		P---C			
		S---C			
4	巻き数比 TURNS RATIO	3---2	48.0±0.2 TS	f=1-100kHz, INPUT: T(3-1)=96TS	全検 ALL
		10---6	9.0±0.2 TS		
		4---5	27.0±0.2 TS		
		9---7	9.0±0.3 TS		
		2---1	48.0±0.2 TS		

(Note 1) TEX is used this time because of the versatility of the transformer. There is no need to use TEX for non-isolated applications.

Measurement Data

Constant Load Regulations

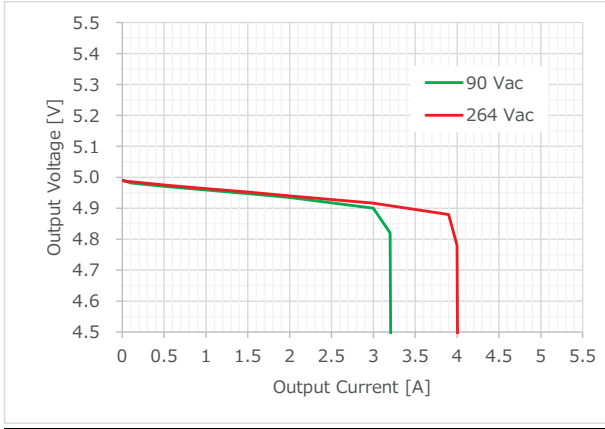


Figure 8. VOUT vs. IOU

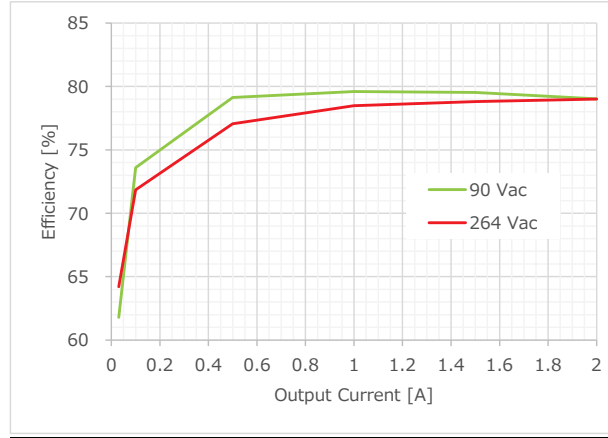


Figure 9. Efficiency vs. IOU

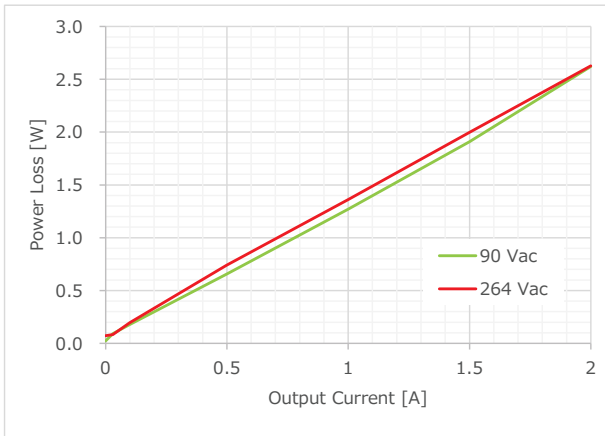


Figure 10. Power Loss vs. IOU

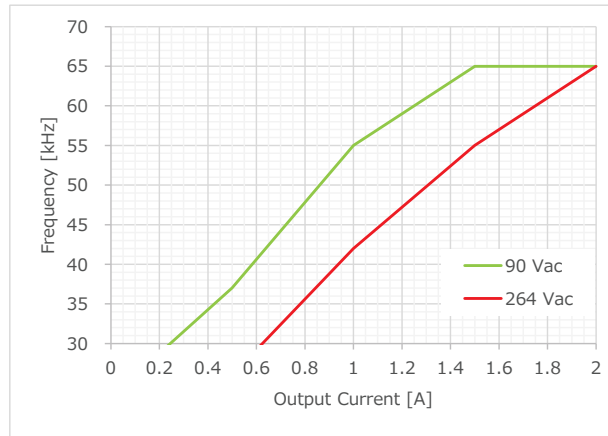


Figure 11. Frequency vs. IOU

Measurement Data - Continued

Waveform



Figure 12. Vds and IL
VIN = 90 Vac, IOOUT = 0 A



Figure 13. Vds and IL
VIN = 264 Vac, IOOUT = 0 A

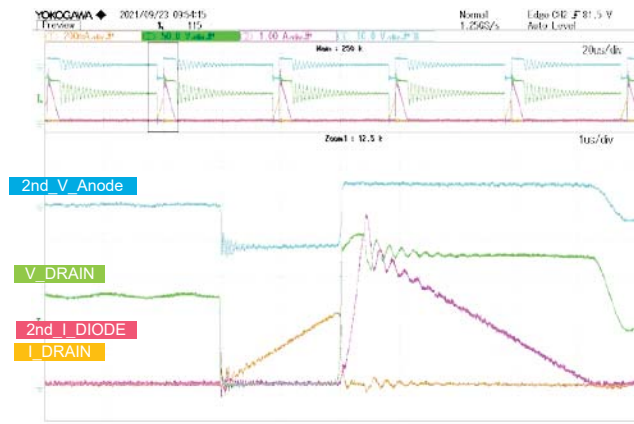


Figure 14. Vds and IL
VIN = 90 Vac, IOOUT = 0.2 A

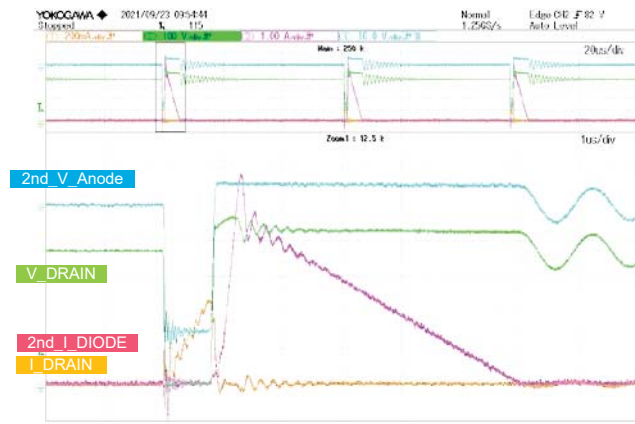


Figure 15. Vds and IL
VIN = 264 Vac, IOOUT = 0.2 A

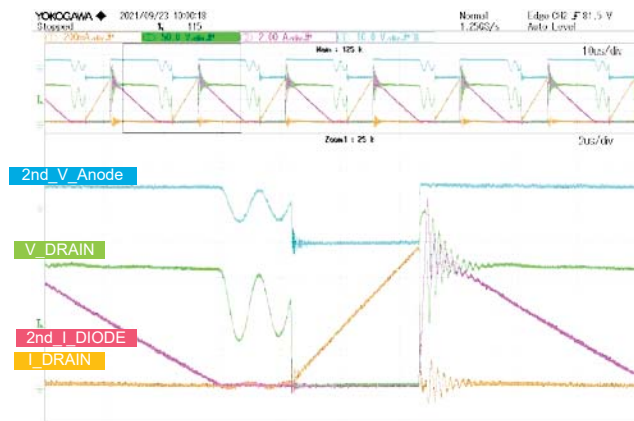


Figure 16. Vds and IL
VIN = 90 Vac, IOOUT = 2.0 A

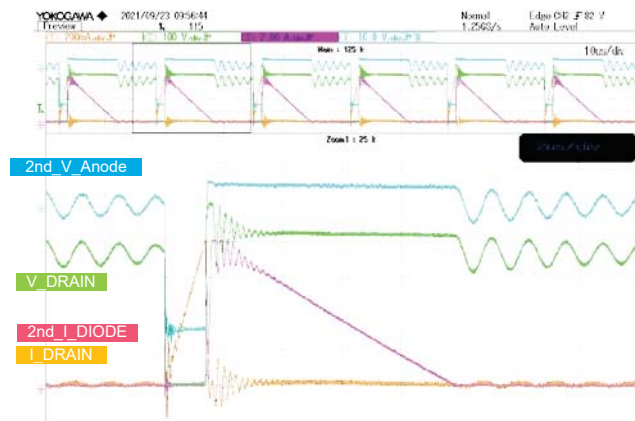


Figure 17. Vds and IL
VIN = 264 Vac, IOOUT = 2.0 A

Measurement Data - Continued

Waveform (Start Up)

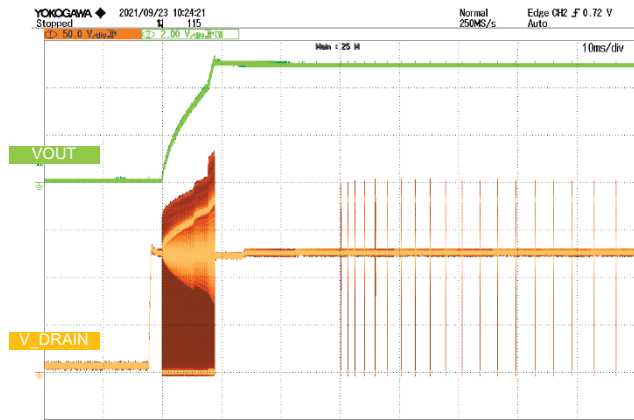


Figure 18. V_{ds} and V_{out}
 $V_{IN} = 90 \text{ Vac}$, $I_{OUT} = 0 \text{ A}$

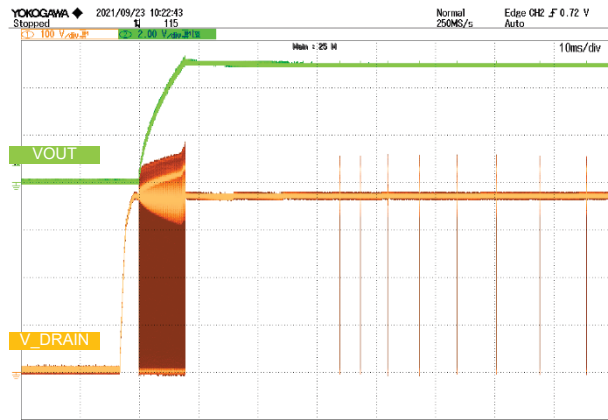


Figure 19. V_{ds} and V_{out}
 $V_{IN} = 264 \text{ Vac}$, $I_{OUT} = 0 \text{ A}$

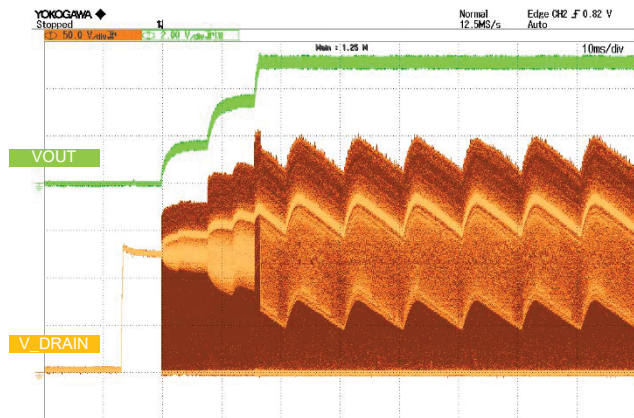


Figure 20. V_{ds} and V_{out}
 $V_{IN} = 90 \text{ Vac}$, $I_{OUT} = 2.0 \text{ A}$

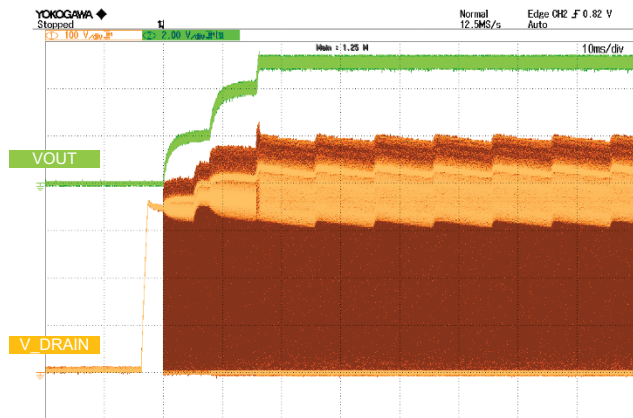


Figure 21. V_{ds} and V_{out}
 $V_{IN} = 264 \text{ Vac}$, $I_{OUT} = 2.0 \text{ A}$

Measurement Data - Continued

Waveform (Load Response)

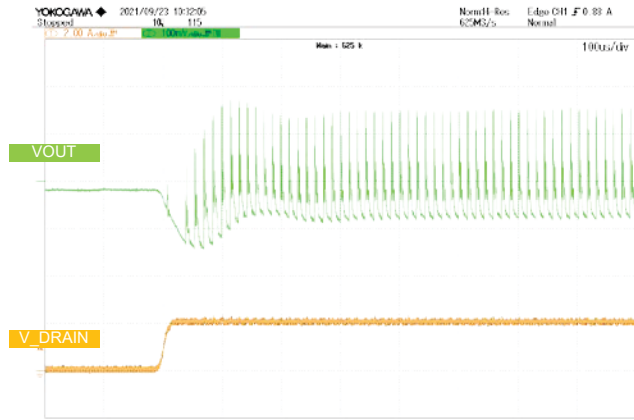


Figure 22. Iout and Vout
VIN = 90 Vac, IOU = 0 A to 2 A

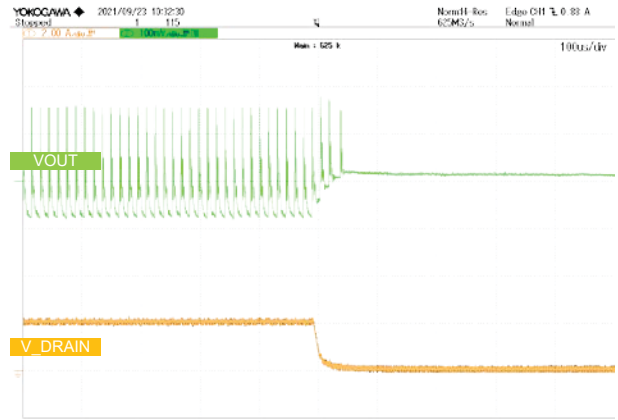


Figure 23. Iout and Vout
VIN = 90 Vac, IOU = 2 A to 0 A

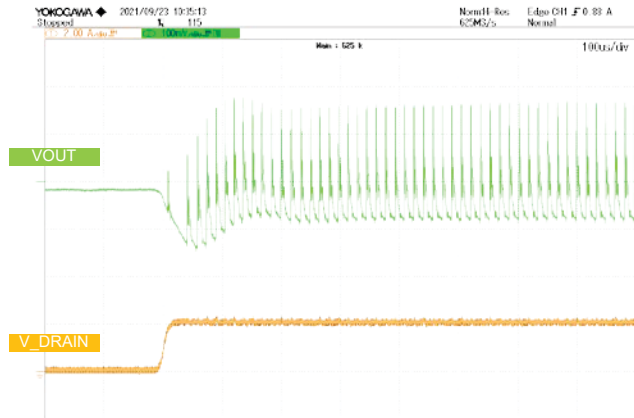


Figure 24. Iout and Vout
VIN = 264 Vac, IOU = 0 A to 2 A

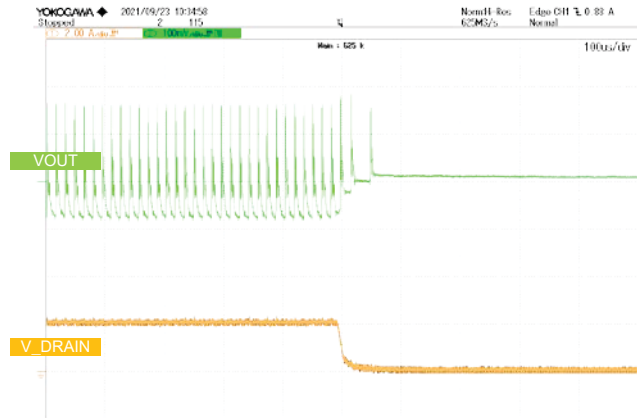


Figure 25. Iout and Vout
VIN = 264 Vac, IOU = 2 A to 0 A

Measurement Data - Continued

Waveform (Ripple Voltage)

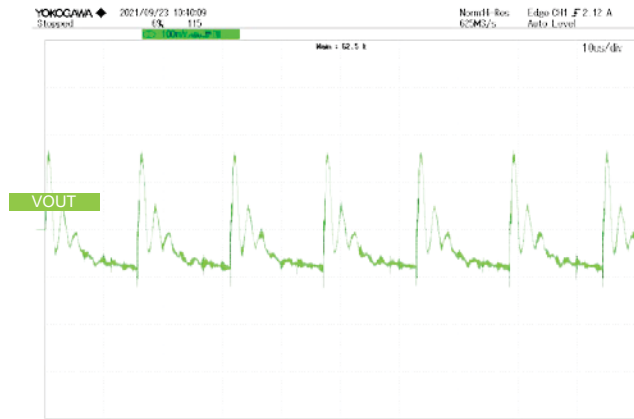


Figure 26. Vout Ripple Voltage (5 MHz Filter)
VIN = 90 Vac, IOUT = 2.0 A


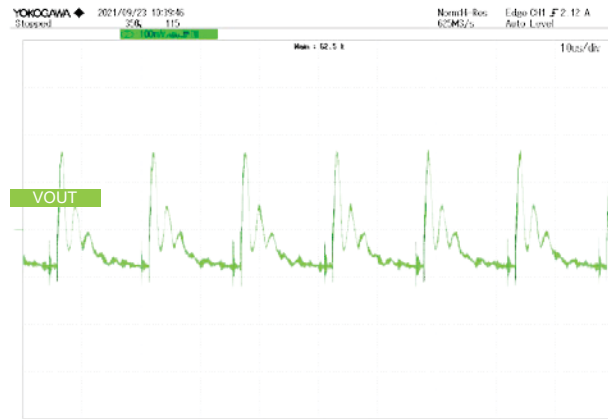


Figure 27. Vout Ripple Voltage (5MHz filter)
VIN = 264 Vac, IOUT = 2.0 A


Operation Temperature

Condition Iout=2.0 A. 20 min


VIN=90 Vac



IC 57.0 °C




Diode 70.9 °C




Inductor 68.2 °C


VIN= 264 Vac



IC 63.2 °C



Diode 71.3 °C



Inductor 73.7 °C

Figure 28. Each device Temperature with maximum output current

Consider selecting parts after checking the temperature range of the parts used.

Measurement Data - Continued

EMI


Data Comment :
 Limit1 : CISPR Pub 22 Class B
 Limit2 : CISPR Pub 22 Class B (AV)

Condition

V_{IN} = 90 Vac
 I_{OUT} = 2.0 A

Margin

QP=17.9 dB (0.91 MHz)
 AV=17.8 dB (0.91 MHz)

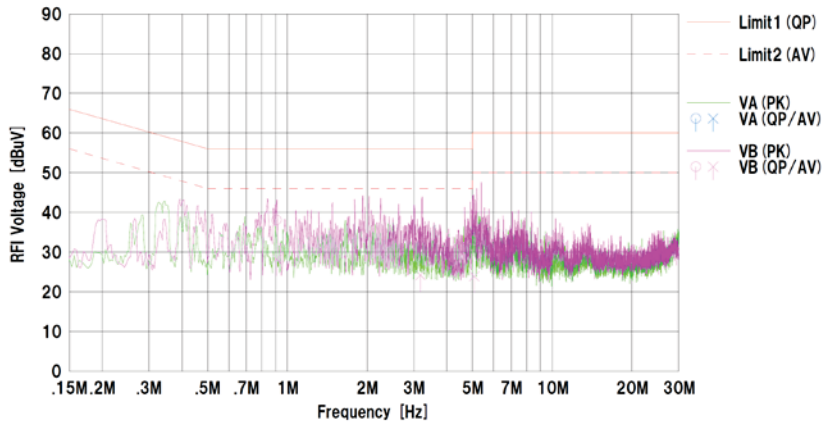

No.	Freq. [MHz]	Reading		C.Fac [dB]	Results		Limit		Margin		Phase	Comment
		<OP> [dBuV]	<AV> [dBuV]		<OP> [dBuV]	<AV> [dBuV]	<OP> [dBuV]	<AV> [dBuV]	<OP> [dB]	<AV> [dB]		
1	0.91050	27.7	17.8	10.4	38.1	28.2	56.0	46.0	17.9	17.8	VB	
2	3.18015	23.5	13.7	10.5	34.0	24.2	56.0	46.0	22.0	21.8	VB	
3	5.07236	22.4	13.3	10.6	33.0	23.9	60.0	50.0	27.0	26.1	VB	

Figure 29. Conduction Noise VIN = 90 Vac


Condition

V_{IN} = 264 Vac
 I_{OUT} = 2.0 A

Margin

QP=16.1 dB (1.11 MHz)
 AV=14.8 dB (1.11 MHz)

Data Comment :
 Limit1 : CISPR Pub 22 Class B
 Limit2 : CISPR Pub 22 Class B (AV)

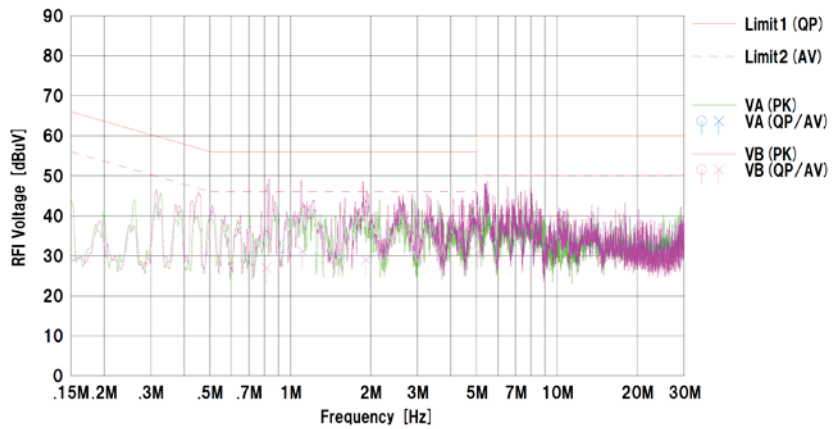

No.	Freq. [MHz]	Reading		C.Fac [dB]	Results		Limit		Margin		Phase	Comment
		<OP> [dBuV]	<AV> [dBuV]		<OP> [dBuV]	<AV> [dBuV]	<OP> [dBuV]	<AV> [dBuV]	<OP> [dB]	<AV> [dB]		
1	0.81296	25.7	16.6	10.4	36.1	27.0	56.0	46.0	19.9	19.0	VB	
2	1.10809	29.5	20.8	10.4	39.9	31.2	56.0	46.0	16.1	14.8	VB	
3	1.91941	27.2	18.5	10.5	37.7	29.0	56.0	46.0	18.3	17.0	VB	
4	5.00623	25.7	20.4	10.6	36.3	31.0	60.0	50.0	23.7	19.0	VB	

Figure 30. Conduction Noise VIN = 264 Vac

Revision History

Date	Rev.	Changes
30.Sep.2021	001	New Release
30.Nov.2021	002	P4 Board size added P6 Transformer electrical characteristics added P13 EMI data added

Notes

- 1) The information contained herein is subject to change without notice.
- 2) Before you use our Products, please contact our sales representative and verify the latest specifications :
- 3) Although ROHM is continuously working to improve product reliability and quality, semiconductors can break down and malfunction due to various factors.
Therefore, in order to prevent personal injury or fire arising from failure, please take safety measures such as complying with the derating characteristics, implementing redundant and fire prevention designs, and utilizing backups and fail-safe procedures. ROHM shall have no responsibility for any damages arising out of the use of our Products beyond the rating specified by ROHM.
- 4) Examples of application circuits, circuit constants and any other information contained herein are provided only to illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.
- 5) The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM or any other parties. ROHM shall have no responsibility whatsoever for any dispute arising out of the use of such technical information.
- 6) The Products specified in this document are not designed to be radiation tolerant.
- 7) For use of our Products in applications requiring a high degree of reliability (as exemplified below), please contact and consult with a ROHM representative : transportation equipment (i.e. cars, ships, trains), primary communication equipment, traffic lights, fire/crime prevention, safety equipment, medical systems, servers, solar cells, and power transmission systems.
- 8) Do not use our Products in applications requiring extremely high reliability, such as aerospace equipment, nuclear power control systems, and submarine repeaters.
- 9) ROHM shall have no responsibility for any damages or injury arising from non-compliance with the recommended usage conditions and specifications contained herein.
- 10) ROHM has used reasonable care to ensure the accuracy of the information contained in this document. However, ROHM does not warrants that such information is error-free, and ROHM shall have no responsibility for any damages arising from any inaccuracy or misprint of such information.
- 11) Please use the Products in accordance with any applicable environmental laws and regulations, such as the RoHS Directive. For more details, including RoHS compatibility, please contact a ROHM sales office. ROHM shall have no responsibility for any damages or losses resulting non-compliance with any applicable laws or regulations.
- 12) When providing our Products and technologies contained in this document to other countries, you must abide by the procedures and provisions stipulated in all applicable export laws and regulations, including without limitation the US Export Administration Regulations and the Foreign Exchange and Foreign Trade Act.
- 13) This document, in part or in whole, may not be reprinted or reproduced without prior consent of ROHM.



Thank you for your accessing to ROHM product informations.
More detail product informations and catalogs are available, please contact us.

ROHM Customer Support System

<http://www.rohm.com/contact/>